


The Gray is where milled fiber and resin replaces the foam.
A 2-layer laminate is applied over the exposed foam after trimming door from fuselage.
The bulb seal is the standard Glasair II part.

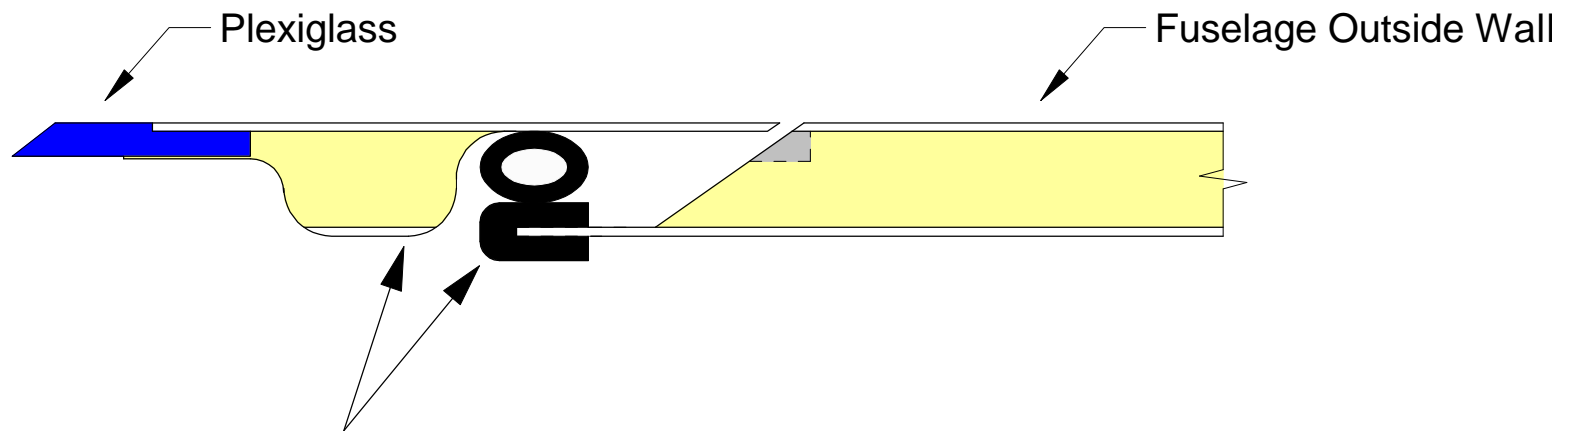

Watch this gap closely before laminating
over the door foam and cutting bulb seal to
length. Be sure you have plenty of clearance.